Lina-A

Product datasheet

Fixed CCT · 54 W

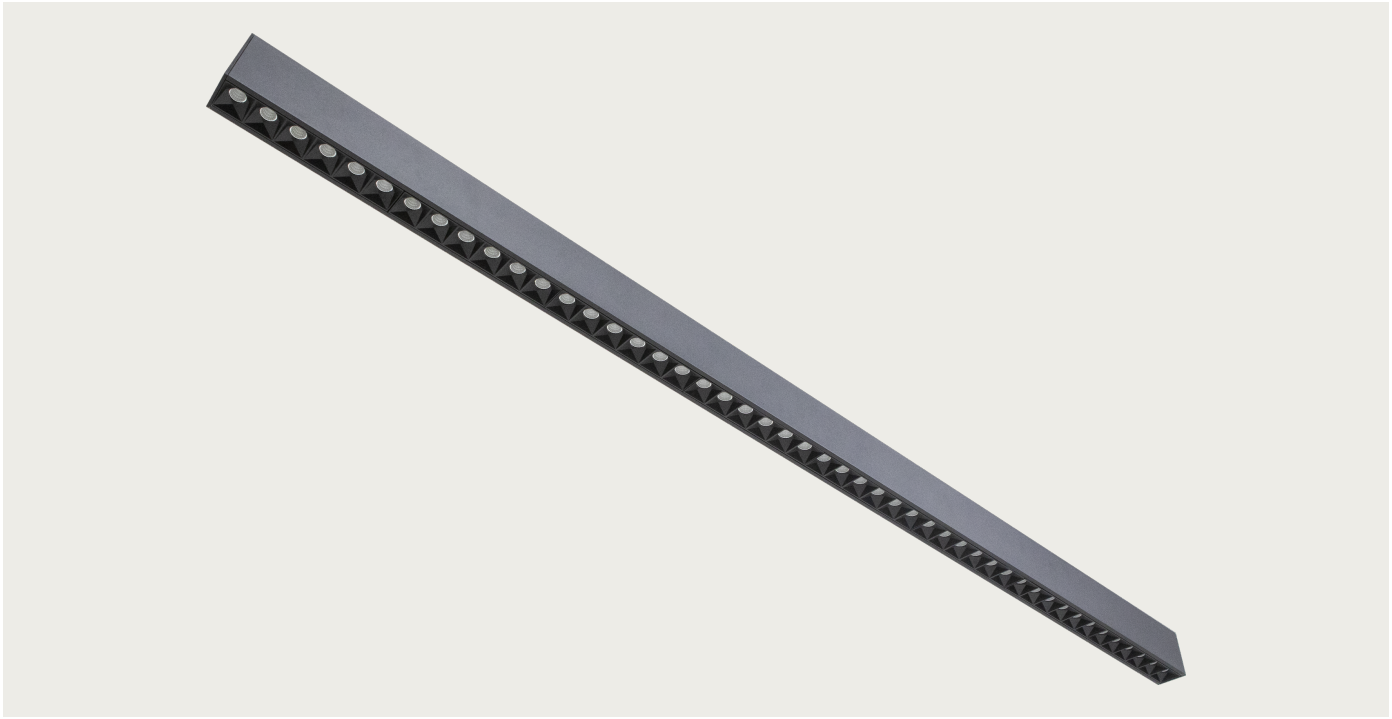

BR-CL1226-54W-A09

Total luminous flux

7,290 lm

135 lm/W

UGR <5

1280 × 40 × 60 mm

Indirect 111° / Direct 54°

BR-CL1526-54W-A09

Total luminous flux

7,560 lm

140 lm/W

UGR <10

1598 × 40 × 60 mm

Indirect 111° / Direct 56°

Select a fixed colour temperature when ordering: 3000 / 4000 / 5000 / 6000 K.

On/off · non-dimmable. Indirect / direct luminous flux ratio 55 / 45.

Technical data

Lina-A / CL1226 + CL1526

Parameter	CL1226 — 54 W	CL1526 — 54 W
Model code	BR-CL1226-54W-A09	BR-CL1526-54W-A09
Total luminous flux	7,290 lm	7,560 lm
Luminous efficacy	135 lm/W	140 lm/W
UGR	<5	<10
Beam angles	Indirect 111° / Direct 54°	Indirect 111° / Direct 56°
Dimensions (parameter sheet)	1280 × 40 × 60 mm	1598 × 40 × 60 mm
Carton dimensions	1420 × 310 × 235 mm	1735 × 310 × 235 mm
Input power	54 W	54 W
Indirect / direct luminous flux ratio	55 / 45	55 / 45
Colour temperature	3000 K / 4000 K / 5000 K / 6000 K	3000 K / 4000 K / 5000 K / 6000 K
CRI	≥80	≥80
LED source	Indirect: Everlight SMD2835 / Direct: Philips SMD3030	Indirect: Everlight SMD2835 / Direct: Philips SMD3030
Sensors	None	None
Control interface	On/off · non-dimmable	On/off · non-dimmable
CCT adjustment	No — fixed CCT selected when ordering	No — fixed CCT selected when ordering
Input	AC 200–240 V / 50 Hz	AC 200–240 V / 50 Hz
Power factor	>0.9	>0.9
Material	Aluminium	Aluminium
Surface finish	Powder coated	Powder coated
Finish	Silver / White / Black	Silver / White / Black
Protection rating	IP40	IP40
Cable length	1 m	1 m
LED lifetime	≥36,000 h	≥36,000 h
Operating temperature	0–40 °C	0–40 °C
Warranty	3 or 5 years, subject to quotation	3 or 5 years, subject to quotation