Lina-C

Product datasheet

Fixed CCT · 54 W

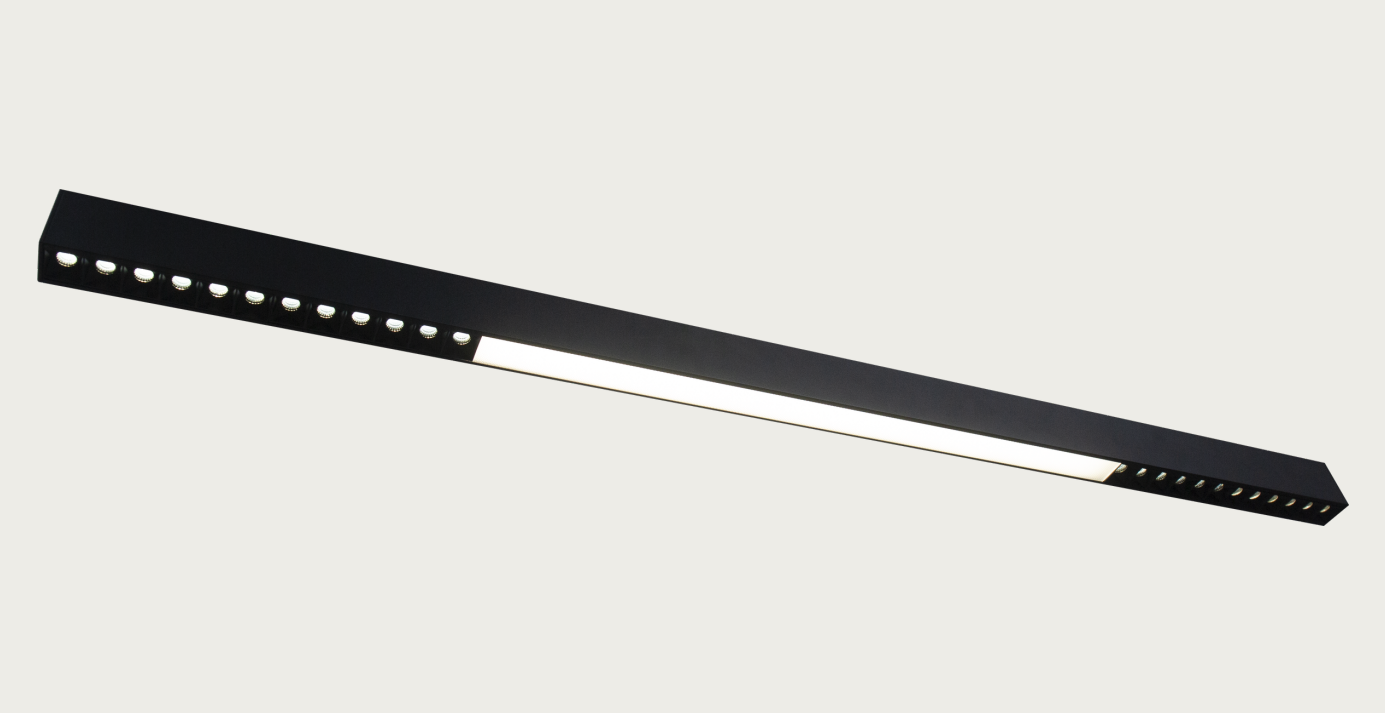

BR-CL1226-54W-A10

Total luminous flux

7,290 lm

135 lm/W

UGR <10

1280 × 40 × 60 mm

Indirect 116° / Direct 54°

BR-CL1526-54W-A10

Total luminous flux

7,290 lm

135 lm/W

UGR <10

1598 × 40 × 60 mm

Indirect 112° / Direct 55°

Select a fixed colour temperature when ordering: 3000 / 4000 / 5000 / 6000 K.

On/off · non-dimmable. Indirect / direct ratio: CL1226 60 / 40; CL1526 65 / 35.

Technical data

Lina-C / CL1226 + CL1526

Parameter	CL1226 · 54 W	CL1526 · 54 W
Order model	BR-CL1226-54W-A10	BR-CL1526-54W-A10
Indirect / direct luminous flux ratio	60 / 40	65 / 35
Indirect luminous flux	4,374 lm	4,739 lm
Direct luminous flux	2,916 lm	2,550 lm
Beam angles	Indirect 116° / Direct 54°	Indirect 112° / Direct 55°
Dimensions (parameter sheet)	1280 × 40 × 60 mm	1598 × 40 × 60 mm
Carton dimensions	1420 × 310 × 235 mm	1735 × 310 × 235 mm
Input power	54 W	54 W
Total luminous flux	7,290 lm	7,290 lm
Luminous efficacy	135 lm/W	135 lm/W
Colour temperature	3000 K / 4000 K / 5000 K / 6000 K	3000 K / 4000 K / 5000 K / 6000 K
CRI	≥80	≥80
UGR	<10	<10
LED source	Indirect: Everlight SMD2835 / Direct: Philips SMD3030 + Everlight SMD2835	Indirect: Everlight SMD2835 / Direct: Philips SMD3030 + Everlight SMD2835
Sensors	None	None
Control interface	On/off · non-dimmable	On/off · non-dimmable
CCT adjustment	No — fixed CCT selected when ordering	No — fixed CCT selected when ordering
Input	AC 200–240 V / 50 Hz	AC 200–240 V / 50 Hz
Power factor	>0.9	>0.9
Material	Aluminium	Aluminium
Surface finish	Powder coated	Powder coated
Finish	Silver / White / Black	Silver / White / Black
Protection rating	IP40	IP40
Cable length	1 m	1 m
LED lifetime	≥36,000 h	≥36,000 h
Operating temperature	0–40 °C	0–40 °C
Warranty	3 or 5 years, subject to quotation	3 or 5 years, subject to quotation