Mori-C

Product datasheet

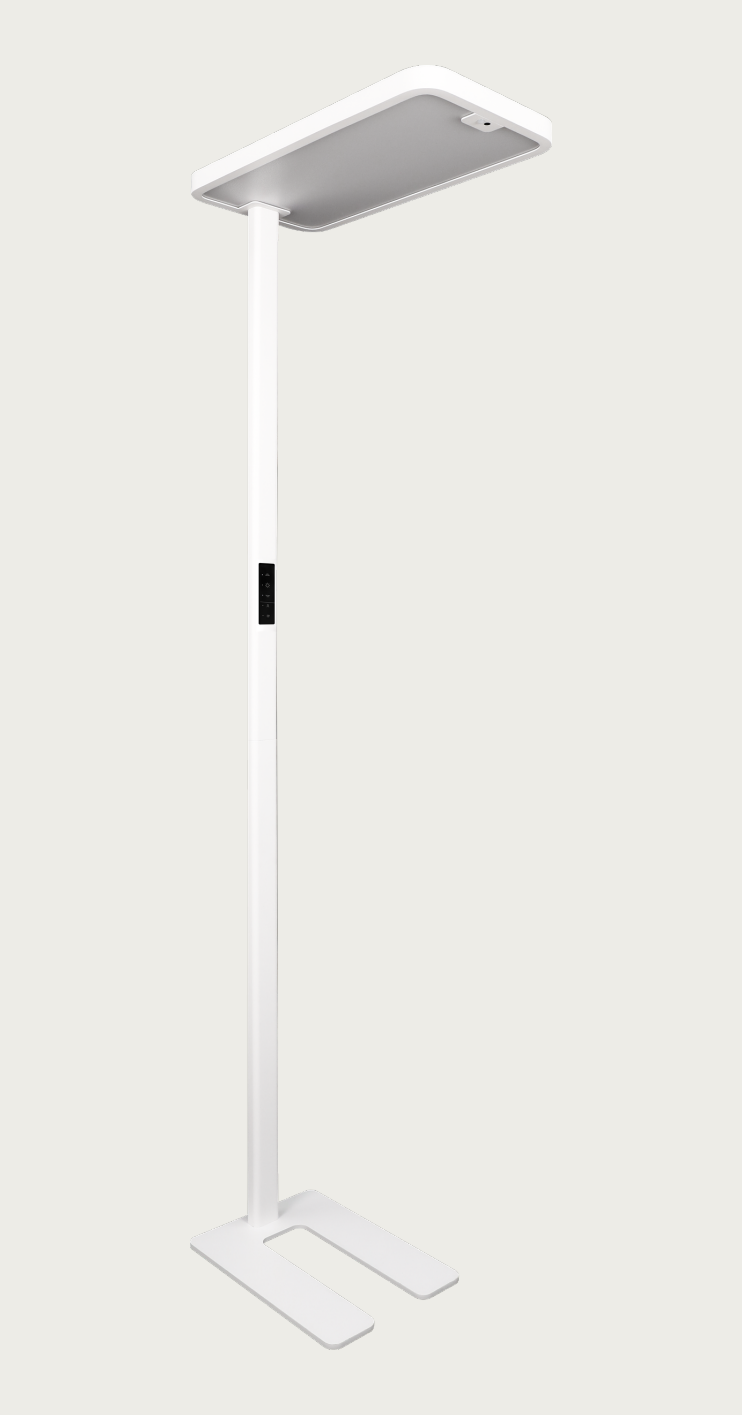

Order model

BR-FS2530-100W-F10

Input power

100 W

Total luminous flux

12,000 lm

Luminous efficacy

120 lm/W

UGR

<13

Select a fixed colour temperature when ordering

3000 K / 4000 K / 6000 K

Independent dimming of direct and indirect light.

LED office floor lamp

Technical data

Mori-C / BR-FS2530-100W-F10

Parameter	Fixed CCT — 100 W
Input power	100 W
Total luminous flux	12,000 lm
Luminous efficacy	120 lm/W
Indirect / direct luminous flux ratio	75 / 25
Indirect luminous flux	9,000 lm
Direct luminous flux	3,000 lm
Colour temperature	Fixed CCT — 3000 K / 4000 K / 6000 K options
CRI	≥80
UGR	<13
Beam angles	Indirect 111° / Direct 77°
LED source	LUMILEDS SMD2835
Sensors	Motion + daylight
Control interface	Touch control · direct / indirect independently dimmable
CCT adjustment	No — fixed CCT selected when ordering
Input	AC 200–240 V / 50 Hz
Power factor	>0.9
Dimensions (parameter sheet)	620 × 320 × 1966 mm
Material	Aluminium
Surface finish	Powder coated
Finish	Silver / White / Black
Protection rating	IP40
Cable length	1.8 m
LED lifetime	≥36,000 h
Operating temperature	0–40 °C
Warranty	3 or 5 years, subject to quotation
Carton dimensions	1087 × 502 × 110 mm